ENTRE/MATIC



Ditec DS10

ICU/Manual Sliding Door Systems

INSTALLED IN:

Hospital ICU/CCUs - Offices - Conference Rooms - Showrooms



ENTRE/MATIC Ditec_DS10_10/20

Manual Sliding Door Systems

STANDARD FEATURES

Smooth, reliable performance

Equal size door panels provide more clear door opening space

Trackless

Concealed Sweeps

Full Open Dampening for soft opening

Designed for easy breakout

Magnetic catch easily returns the door to a latched position after breakout

AVAILABLE OPTIONS

Smoke seal package (UL 1784)

5/8", 1" and 1 1/4" glass stops available

7" and 10" bottom rails

1" wide jambs for additional clear opening space

Magnetic Hold Open

Self Closing feature closes active leaf to prevent doors from being left open

A/L Dampener for soft-close

Anti-static system reduces unwanted electrostatic discharge in hospital environments Technical data subject to change without notice.

Centering wheel helps ensure a positive latch despite hallway air pressure

Track Package

Positive Latching

Full Closing Dampening Device for soft close

Gutter & snap for integrated mini-blinds

Special finishes


| DS10 STANDARD PACKAGE | |
|-------------------------------------|--|
| Configurations | two-panel single slide or three-panel telescopic trackless (full breakout or fixed sidelite) |
| Header Size | 4 1/2" x 4 1/2" (single slide) 6" x 4 1/2" (telescopic) |
| Minimum Clear Door Opening Width | 41 1/2" for 8' unit width; 44 1/2" for 8'6" unit width |
| Vertical Jambs | 1 3/4" x 4 1/2"; 1 3/4" x 6" (telescopic) |
| Glass Stops | 1/4" |
| Door Panels | Narrow Stiles (2 1/2") |
| Muntin Bars | 1 3/4" standard |
| Top Rails | 2 1/2" (active leaf); 4" (sidelite) |
| Bottom Rails | 4" standard |
| Door Pulls | Surface or Recessed |

Smoke Rated Seals (UL 1784) available

Clear or Dark Bronze anodized

Seal

Finish

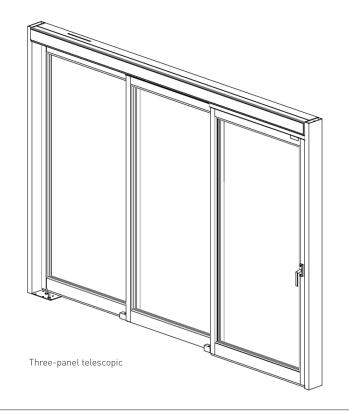

Distributed By:







Entrematic Canada Inc. 221A Racco Pkwy Vaughan, ON L4J 8X9 Tel 416-674-8880 Fax 416-674-8882 Toll Free 877-348-6837 www.ditecentrematic.ca











